

Customer Name:.....
 Sales Order No:.....
 Gate Height:.....
 Gate Width:.....
 Salesman:.....


NOTE: HINGES WILL BE FITTED AS STANDARD UNLESS INDICATED

IF FITTINGS ARE REQUIRED TO BE SUPPLIED SEPARATELY PLEASE TICK BOX.....


Wide Entrance Gate

Specification (Above 2.0m - 3.0m Wide)
 Gates are 1.2m high except for the curved hanging stile which is 1.5m 125 x 75mm. Slam stile is 75 x 75mm. Top rail is 100 x 75mm and under rail and cross braces 75 x 25mm. Supplied in natural jakcured finish.

If gates are automated with underground operators, bottom rail is increased to 75 x 75mm, with stiles cut back to suit.

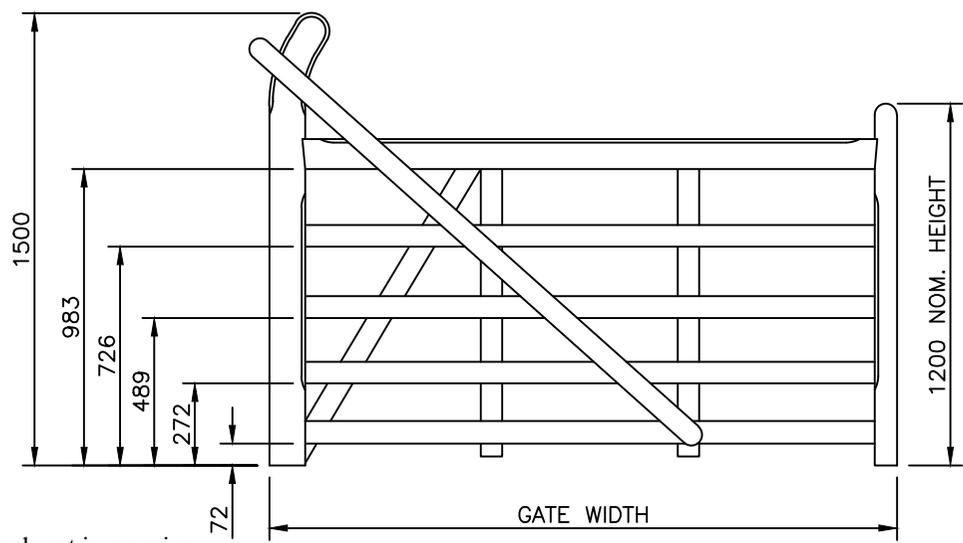

VIEWED FROM OUTSIDE
GATE LEFT HAND HANGING.

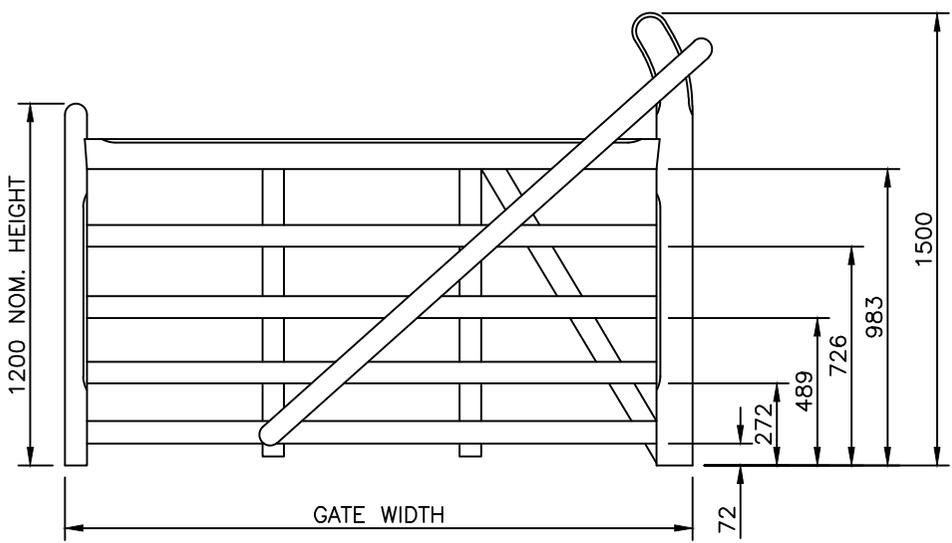

VIEWED FROM OUTSIDE
GATE RIGHT HAND HANGING.

Manufacture
Tolerance
+/-5mm

- All timber used through out is superior quality Jakcured softwood guaranteed for 25 years
- The timber is machined to a standard size, stop chamfered and planed
- All rail and cross bracings are bolted with stainless steel bolts
- All joints are morticed and tenoned
- Traditional attractive designs

DO NOT SCALE – IF IN DOUBT ASK



Stowting Common, Near Ashford,
 Kent. TN25 6BN
 Telephone: 01233 750393
 Fax: 01233 750403
 www.jacksons-fencing.co.uk
 www.jacksons-security.co.uk

- ③ 08/11/18 Rail Pitch Dims Added
- ② 13/02/06 Auto Note Added
- ① 13/11/04 UPDATE

Drawn	WB	TITLE	WIDE ENTRANCE GATE (STANDARD)
Date	13/11/04	CUSTOMER	Drawing No.
Checked		ACK No.	04 J7/02094
Size	A3	Scale	NTS U.O.S
			Sheet 6 of 7

This Drawing Is The Property Of H.S. Jackson & Son (Fencing) Ltd, And May Not Be Copied Or Reproduced In Any Way Without Prior Written Permission.