


Working on Uneven Ground Levels

When working on uneven ground, placing posts in holes of similar depths means that the top of the posts will not be in line with each other. This causes more difficulties when attaching the Side Rails and Cross Members.

It is imperative to get the top of the posts aligned with each other and in the correct vertical position. This can be accomplished by following the instructions closely and frequently using a spirit level to check the positioning during setting.

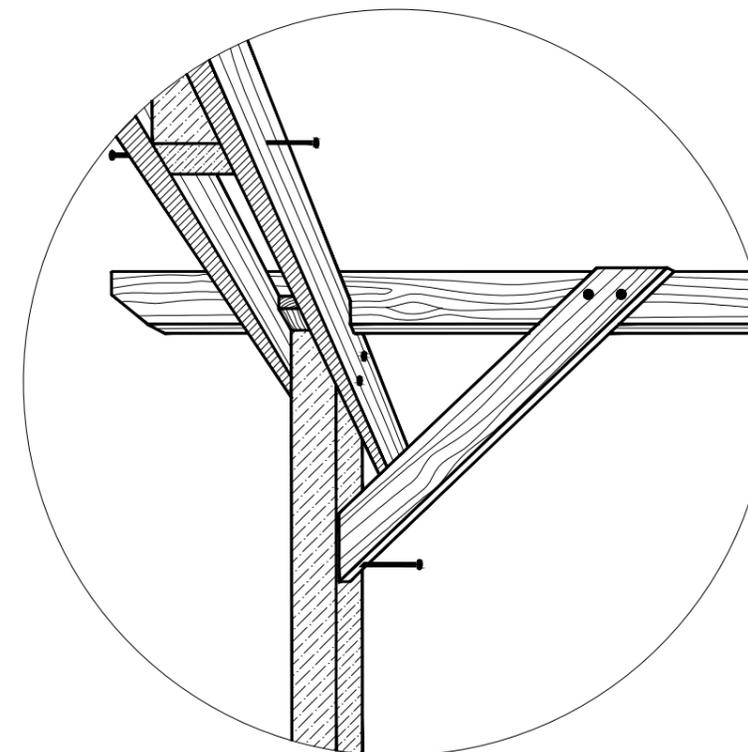


Aligning the Posts

After setting your first post, mark the set post and the remaining posts with a pencil line 1.0M down from the top of each post.

When positioning the next post in the run, attach a string line so that it runs taut and horizontally along the pencil line of each post.

Use a Spirit Level, holding it on the string line, and position the post so that the string line lies horizontally.

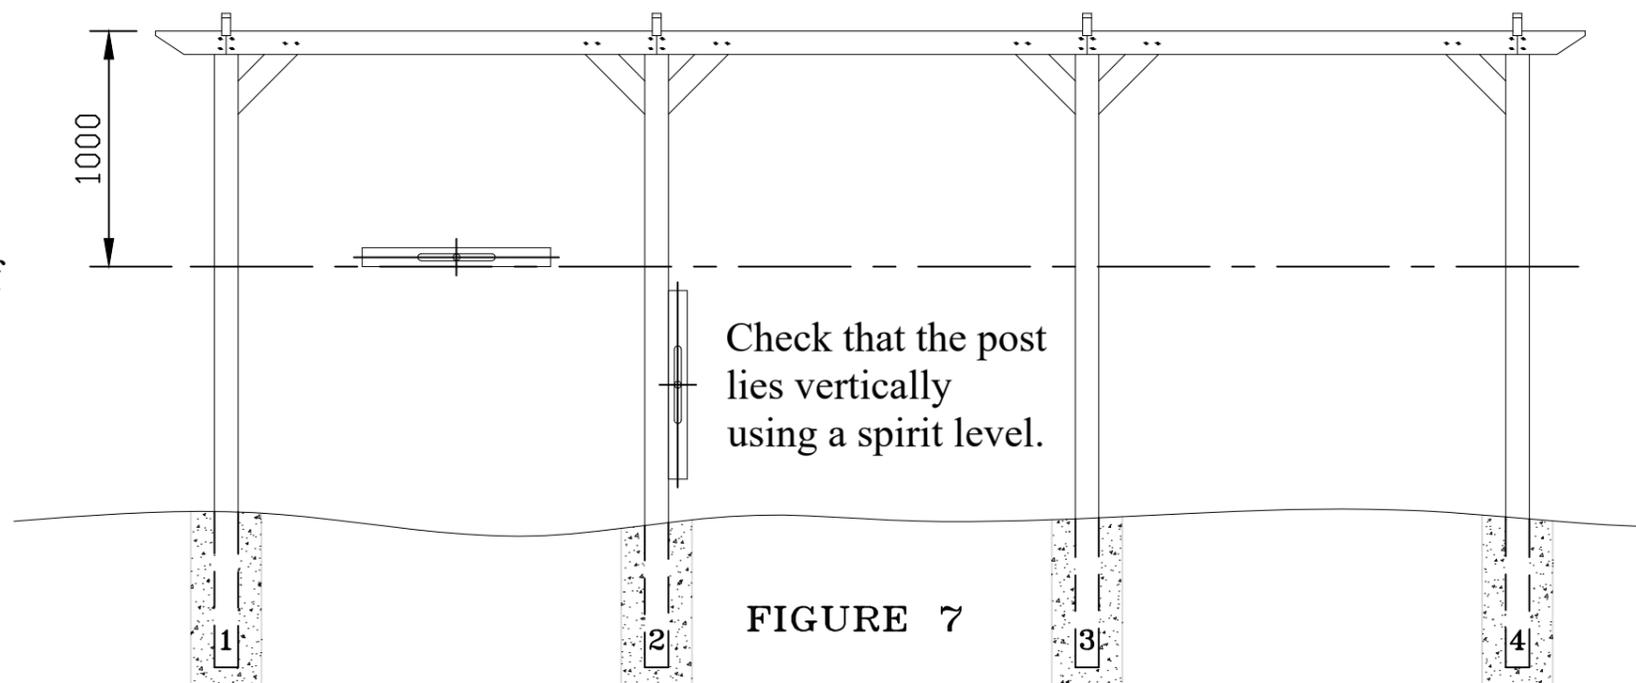

**Jacksons
Fencing**

Stowting Common, Near Ashford,
Kent. TN25 6BN
Telephone: 01233 750393
Fax: 01233 750403
www.jacksons-fencing.co.uk
www.jacksons-security.co.uk

DO NOT SCALE – IF IN DOUBT ASK

Drawn WB
Date 17/02/2023
Checked
Size A3
Scale 1:30 U.O.S

TITLE DOUBLE PERGOLA SYSTEM

CUSTOMER

ACK No.

Drawing No.

J7/01036
Sheet 2

This Drawing Is The Property Of H.S. Jackson & Son (Fencing) Ltd, And May Not Be Copied Or Reproduced In Any Way Without Prior Written Permission.

① 17/02/2023 UPDATED DRAWING BORDER